

SmartDri A292

TECHNICAL

SINGLE WIDE BLADE HAND DRYER *with HEPA filter*

A292-W (WHITE) HD15380 / A292-B (BLACK) HD15381



ECO LABEL RATED

- *WIDE BLADE DRIES BOTH HANDS SIMULTANEOUSLY*
- *5-10 SECOND DRY TIME*
- *SELECT 400 OR 1250 WATTS (NO HEAT OR HEAT)*
- *STRONG OR SOFT AIR FLOW OPTION SWITCH*
- *HEPA FILTER - EASY CHANGE*
- *ENERGY EFFICIENT - VERY LOW OPERATING COST*
- *UNIQUE BACKPLATE -EASY TO INSTALL/SERVICE*

SmartDri A292

TECHNICAL

SAFE SURFACES

Our revolutionary antimicrobial infused components inhibit the growth of microbes including Staphylococcus and E.coli. Components are manufactured from special resins using EPA approved silver ion technology that infuses plastic parts and coatings with antimicrobial properties.

SPECIFICATIONS

Enclosure - ABS FR, Base - ABS FR, Fan Housings - FR
All plastics are flame retardant to UL94 VO, Class II double insulated, enclosure splash/drip proof to IPX3, non-corrosive.

Dimensions

Height - 245 mm, Width - 284 mm, Depth - 171 mm

Net weight 3.9 kgs.

Electrical rating 220-240 V~ 50-60Hz, 400 - 1250 W,

Noise level 75 dB.

Air velocity 105m/s. Motor Speed 26,000 RPM

Temperature at outlet - 36° C

Hot and Cold switch - Yes

PLANNING

Generally, one hand dryer is recommended for every two hand basins. For heavy use in large washrooms, use two hand dryers for every three basins.

ELECTRICAL SAFETY APPROVALS

AS/NZS 60335.2.23 in conjunction with AS/NZS 60335

Certificate of suitability No. Q070141

ELECTRICAL CONNECTION & ADDITIONAL NOTES

This dryer is double insulated. Dryers are provided with a supply cord and plug. Dryer(s) may be fixed wired. Wiring should emerge from the wall at the position marked - Fixed wiring entry.

TOTAL SATISFACTION WARRANTY

Electronic Control Only Warranty - 2 years


All other components - 2 years

DISABLED PERSON COMPLIANT 

EMC COMPLIANT  Z184



A292-W
WHITE

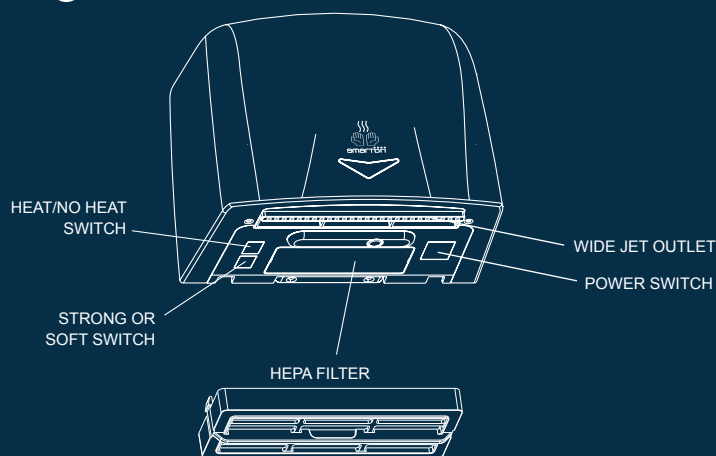

ARDRICH LIMITED

31 HANNIGAN DRIVE P + 64 9 570 2861

AUCKLAND 1072 F + 64 9 570 2864

NEW ZEALAND E info@ardrich.co.nz

CALL **0800 802861**